

Project	
Notes	
Type	Date
Cat. No.	

LTR™ SR/RC Series

LED Troffer Retrofit Kit - Sensor Ready

DESCRIPTION

The Aleo LTR™ (SR/RC) Series Troffer Retrofit Kit delivers industry-leading Versatility with deep energy savings and continuous dimming. Easy and quick installation reduces labor cost and optimizes ROI. The retrofit kit eliminates the need to replace existing luminaire housing, which reduces install time and disposal/removal costs. The precision-formed diffuser produces comfortable and pleasant illumination, enhancing productive spaces in various applications.

APPLICATIONS

Provides architectural aesthetics for retail, schools, offices, healthcare, and other various commercial applications.

Specification Features

Construction

Simple construction with minimal parts allows for easy handling and installation. Luminaire features matte white durable finish.

Optical System

Reflector systems features highly reflective coating and delivers balanced, comfortable luminance for productive spaces. Diffuser lens reduces glare and improves occupant comfort while maintaining high efficiency emission.

Certification

UL Classified. All components have UL certification. UL Class 2. Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2.

Warranty

7-year Limited Warranty. See warranty documentation for more information.

Electrical

Luminaire utilizes high-efficacy LED packages maintained at cool temperatures for long life, high efficacy. Reliable driver features continuous dimming. Universal voltage (120-277V) for convenient installation. Comes equipped with luminaire quick-disconnect.

Field-Adjustable CCT & Wattage

Increased versatility and reduced inventory burden. Wattage and Color Temp. can be adjusted in the field by selecting (3) different wattages and (3) different CCTs via switch on driver.

Installation / Mounting

Installs in most troffer luminaires. Retrofit kit fits within troffer and ceiling T-bar grid, eliminating need to remove existing fixture housing.

Controls / Dimming

Continuous dimming (0-10V) comes standard. Suitable for use with dimmers, sensors, daylight harvesting and other control strategies to achieve deeper energy-savings and code compliance.



LTR Series

2x2 20W / 25W / 30W

2x4 25W / 30W / 34W

Rated Life 75,000 hours

Limited Warranty 7-years

Efficacy Up to 130 LPW

Continuous Dimming



Ordering Information

LTR-24-UXL/8CT G6-HD (SR/RC)

LTR	24	UXL	8	CT	[Blank]
Series LTR LED Troffer Retrofit Kit	Form Factor 22 2'x2' 24 2'x4'	Lumen Package UXL Field Adjustable 2'x2' 20W / 25W / 30W 2'x4' 25W / 30W / 34W	CRI 8 83+	Color Temp CT Field Adjust. 3500K 4000K 5000K * Utilize 3-way switch to select	Design HD Hinged Door Design
[Blank]	[Blank]	Options			
Sensor (SR/RC) Sensor Ready with sensor receptacle	Dimming Blank 0-10V Continuous Dimming	Controls See Pg. 2 for Ordering Details on sensors and controls (Sensor Sold Separately)	Emergency Backup¹ EM700 700lm EM1400 1400lm	Accessories -AH Air Handling	Designation BAA Buy American Act Compliant BABAA Build America, Buy America Act Compliant


Performance Summary

Input Voltage	120V-277V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 130 LPW (typ.)
CRI	83+, R9 > 0
Available CCT ¹	3500K / 4000K / 5000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	75,000 hours
L70 ³	> 54,000 hours
Power Factor	> 0.9
THD	< 20%
Dimming	0-10V Continuous (10-100%)
Operating Temp	-20°C to 50°C

Sensor Ready Quick Connect



Mounting Information

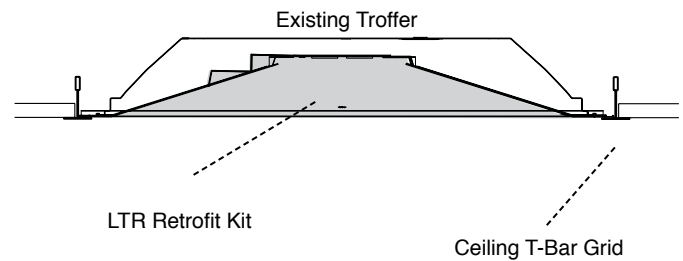

Sensors Options



Catalog No.	Description	Ordering	Shipping	Remote Control	Sensor Mounting
SPIR-OSDL/BT-PP3-DC-310	AleoBlue Multi-level Wireless Bluetooth Occ Sensor w/ Daylight	Order and Ship Separately	Field Install	AleoBlue App	Snap-in
SPIR-OSDL/BTEZ-PP3-DC-121	SimpliBlue Multi-level Wireless Bluetooth Occ Sensor w/ Daylight	Order and Ship Separately	Field Install	SimpliBlue App	Snap-in

BAA and BABAA Compliant

**BAA - Buy America Act Compliant**


Complies and Qualifies for projects requiring Buy America Act (BAA) compliant product

BABAA - Build America, Buy America Compliant

Complies and Qualifies for projects requiring Build America, Buy America Act (BABAA) compliant product

¹Note: BAA and BABAA product will require lead times approximately ranging from 12-18 weeks. Contact your Aleo representative for more information

Field-Adjustable CCT & Wattage

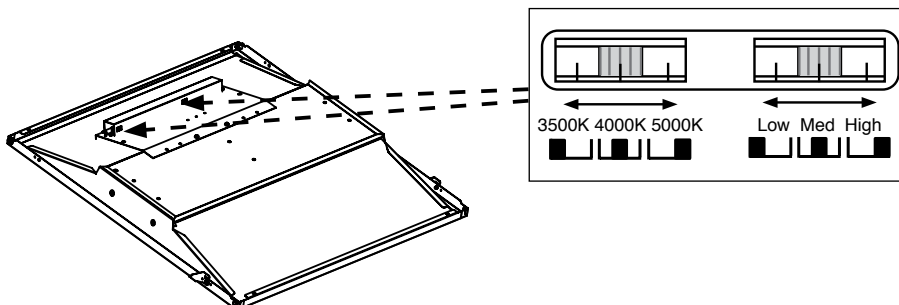

¹ IMPORTANT: THE BATTERY MUST BE RECHARGED EVERY THREE (3) MONTHS. IF NOT RECHARGED ACCORDINGLY, BATTERY MAY FAIL AND VOID WARRANTY


Performance Data

Form Factor	Catalog No.	Rated Wattage (W)	3500K		4000K		5000K	
			Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
2' x 2'	LTR-22-UXL/8CT G6-HD (SR/RC)	20	2680	134	2880	144	2700	135
		25	3275	131	3525	141	3300	132
		30	3810	127	4110	137	3840	128
2' x 4'	LTR-24-UXL/8CT G6-HD (SR/RC)	25	3525	141	3800	152	3625	145
		30	4140	138	4470	149	4260	142
		34	4590	135	4964	146	4726	139


Product Dimensions

 **MOQ** Carton Qty: 2

2' x 4'

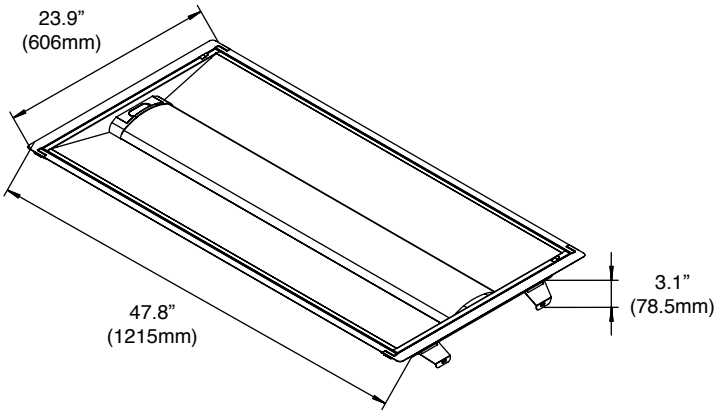

2' x 2'

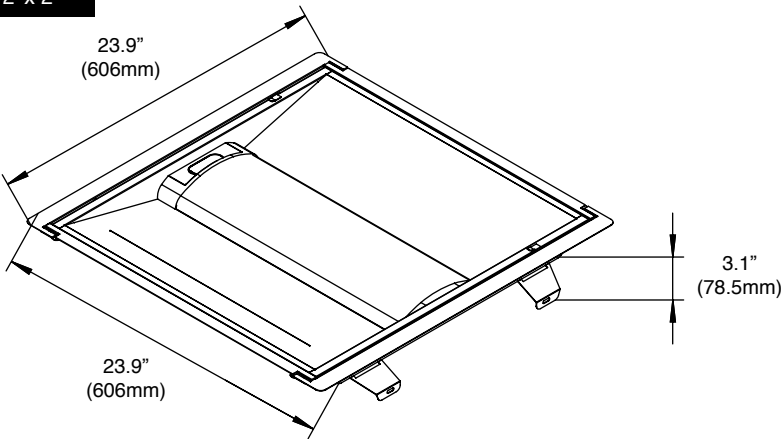



AleoBlue Wireless Bluetooth Controls




The AleoBlue is a complete solution for managing connected lighting systems using a Bluetooth Mesh lighting network. This enables seamless implementation of simple to complex lighting control scenarios without specialized training or lighting control engineering expertise.

DLC NLC Qualified.

Features and Benefits

- Lighting Zones / Grouping
- Manual control of individual lights
- On Power up Behavior
- Zone Linking
- Vacancy Sensing
- Per fixture Daylight Control
- Per zone Daylight Control


Scheduling




High and Low End Trim



Scenes



Occupancy Sensing



- Optimized Energy Consumption
- Less Hassle with On-Site Adjustments
- More Savings
- Increased Safety
- More Flexibility

- Intuitive and user-friendly web and iOS apps
- No specialized training or lighting control expertise required
- Optimized for commercial spaces of any size
- No additional wiring or central control box
- Customizable lighting control parameters
- Future proof with Software Updates
- Multiple Zone Configurable
- Built-In Scenarios + Customization

Bluetooth Mesh Technology Advantages



The fastest low-power communication



Scalability to thousands of devices




The most advanced encryption standards as well as the cutting-edge device authentication




No single point of failure (no central device)





Compatibility with a widely available devices (smart phones & tablets – both with Bluetooth 4.0 and Bluetooth 5)

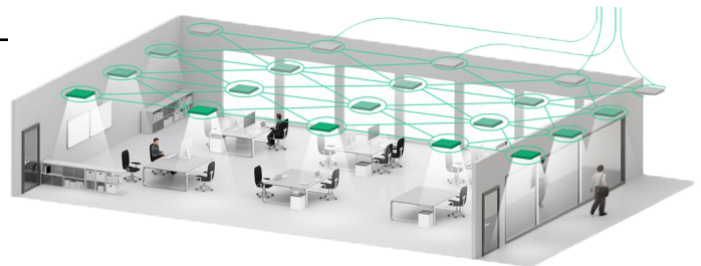



Planning


Remote preparation of a retrofit project with the use of our web app. Uploading floor plans, defining individual lighting zones and choosing lighting control scenarios.

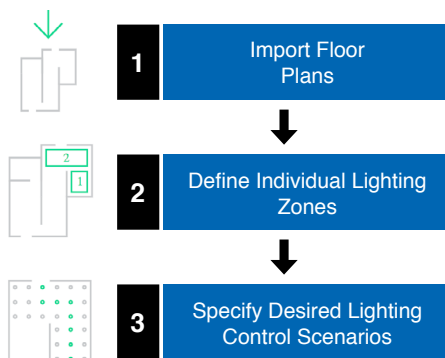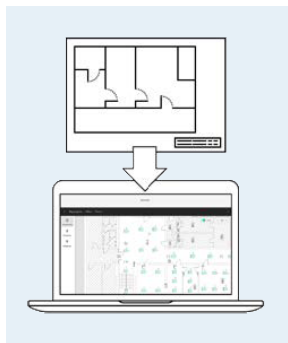

Implementation

Adding lighting devices to the Bluetooth mesh network on-site with the use of an iOS app.


Customization and calibration of lighting control parameters during and after the commissioning process. Defining scenes for specific working activities.

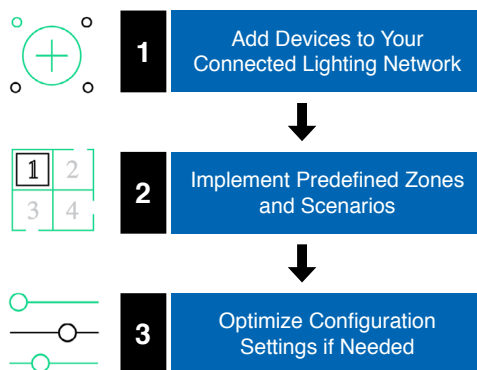

Provisioning / Configurations

The Bluetooth mesh Node is in the Unprovisioned Mode until it is provisioned by a "Provisioner", which typically is a smart phone with a Bluetooth mesh compatible app.

Ordering Information



**Wireless Bluetooth
Occupancy Sensor**

Model: SPIR-OSDL/BT-PP3-DC-310



**AleoBlue, Kinetic Powered
Single-Rocker Switch**

Model: WM-KN-DMSR/BT-200


Lighting Control Scenarios

Multiple lighting control scenarios are available once the Bluetooth mesh Node is provisioned. At each scenario, duration, fade time and target brightness can be configured at any time with the iOS app.




Mode / Scenario	Wireless Switch	Occupancy Sensor	Ambient Light Sensor
Unprovisioned Mode	-	-	-
Switch	On / Off / Scenes	-	-
Occupancy	On / Off / Scenes	Auto On / Off	-
Vacancy	On / Off / Scenes	Auto Off	-
Occupancy with Daylight Harvesting	On / Off / Scenes	Auto On / Off	Enabled
Vacancy with Daylight Harvesting	On / Off / Scenes	Auto Off	Enabled


Occupancy Scenario

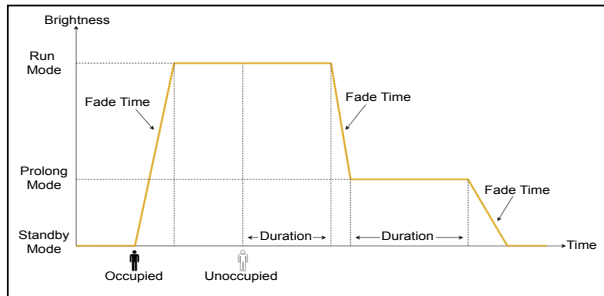


Vacancy Scenario

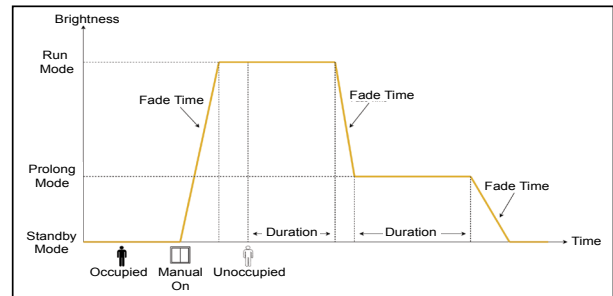

Occupancy Scenario - with Daylight Harvesting

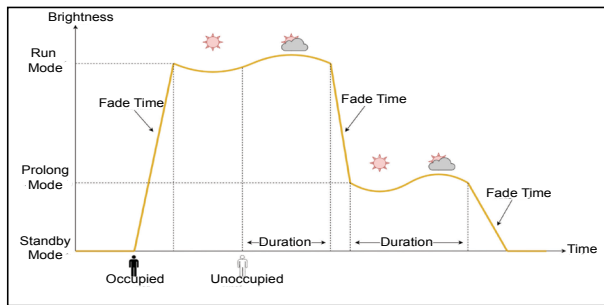





Occupancy Scenario with Manual Override

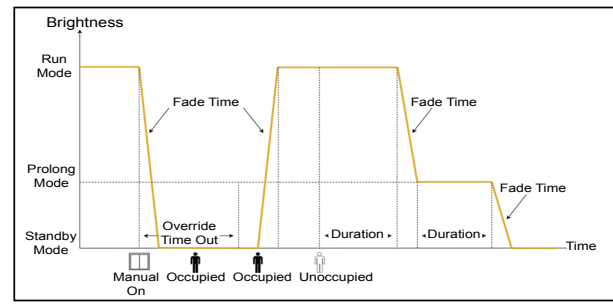

Occupancy Detection Pattern

H	X	Y
7.9' (2.4m)	16.4' (5.0m)	16.4' (5.0m)
8.9' (2.7m)	18.4' (5.6m)	18.4' (5.6m)
9.8' (3.0m)	20.3' (6.2m)	20.3' (6.2m)

Orientation Indicators

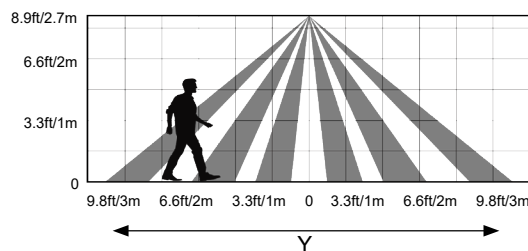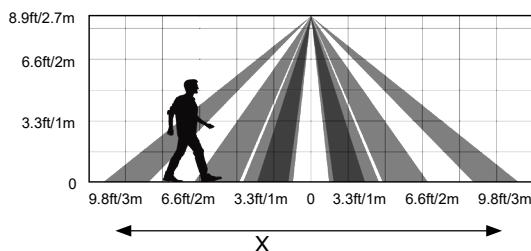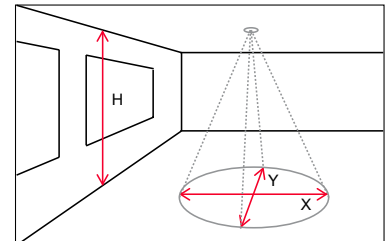

© 2025 Aleo Lighting, Inc. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. Aleo Lighting reserves the rights make changes in specification at any time without notice.

Aleo Lighting, Inc.
www.aleolighting.com
10988 Bloomfield Ave.
Santa Fe Springs, CA 90670
Ph: 877-358-8825

aleoTM
LED LIGHTING