
WMC™ Series

Outdoor Cylinder Wall Pack

Includes: WMC-3-10UX/8CT,
WMC-4-20UX/8CT, WMC-6-36UX/8CT

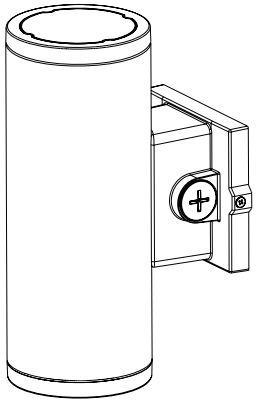

INSTALLATION INSTRUCTIONS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

WARNING

FAILURE TO FOLLOW THESE INSTRUCTIONS AND WARNINGS MAY RESULT IN SERIOUS INJURY OR DAMAGE TO PROPERTY

For your safety, thoroughly read these instructions and warnings in their entirety prior to installing or servicing this product. These instructions do not attempt to cover all installation and maintenance circumstances. If you do not understand these instructions or if additional information is needed, please contact your Aleo Lighting customer service.

WARNING

RISK OF FIRE OR ELECTRIC SHOCK

This product must be installed and serviced by a professional electrician in accordance with applicable federal, state, and local laws, regulations, and electrical code. If not qualified, do not attempt installation of this product. Contact a qualified electrician.

WARNING

RISK OF FIRE, ELECTRIC SHOCK, or PERSONAL INJURY

To avoid risk of electrical shock, turn off power before installing or servicing.

Verify that supply voltage is correct by comparing with the input voltage on the luminaire label.

Make all electrical and ground connections in accordance with NEC and any applicable code requirements

WARNING

RISK OF PERSONAL INJURY

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects

Do not make or alter any open holes in any of the enclosures with wiring or electrical components during installation.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

WARNING

This luminaire is made for permanant installation in ordinary (non-hazardous) locations in accordance with NEC code and all applicable local and federal codes.

Proper grounding is required to ensure personal safety. Check the voltage is compatible with the fixture driver, and use approved connectors for all electrical connections.


TURN OFF POWER BEFORE INSTALLING

Electrical Connection

1. Connect the BLACK wire with the LINE.
2. Connect the WHITE wire with the NEUTRAL.
3. Connect the GREEN wire with the GROUND.
4. Connect the PURPLE wire with the (+) DIM.
5. Connect the PINK wire with the (-) DIM.


CAUTION: DO NOT connect the PINK (-) DIM V - wire with GROUND.


Wiring Diagram

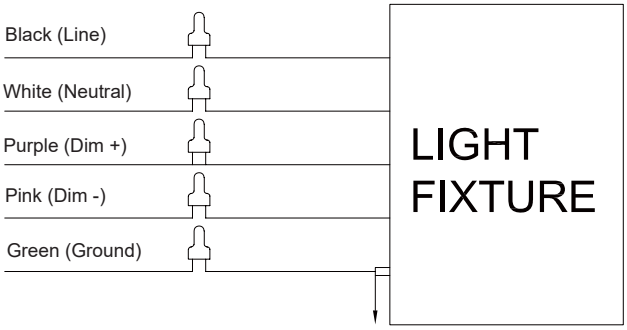

FIELD ADJUSTABLE WATTAGE / CCT | BEAM ANGLE | UP / DOWN LIGHT | PHOTOCELL ON / OFF

Follow the instructions below to change the Fixture Power (W), Color temperature (CCT) Beam Angle (B), Up/Down Light (L), and Photocell ON/OFF (P) from factory settings: Photocell is ON, Max wattage, 4000K, 40°, light direction is full.

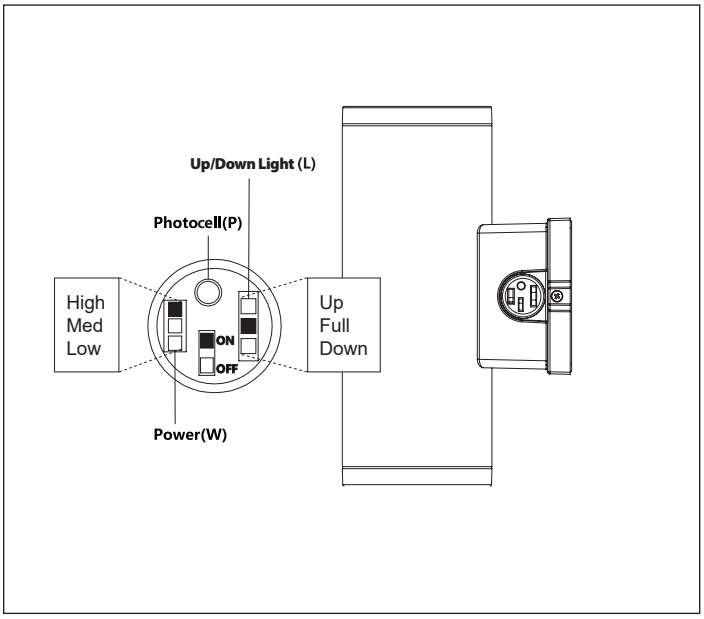

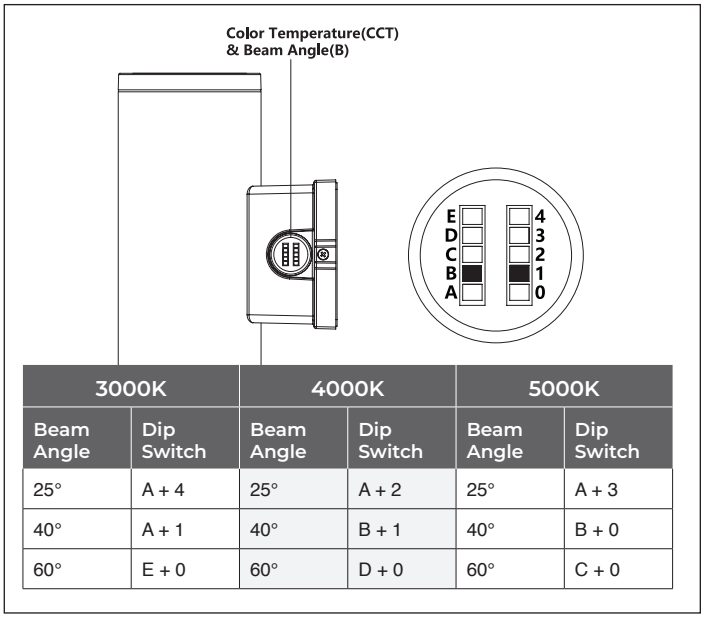

3000K		4000K		5000K	
Beam Angle	Dip Switch	Beam Angle	Dip Switch	Beam Angle	Dip Switch
25°	A + 4	25°	A + 2	25°	A + 3
40°	A + 1	40°	B + 1	40°	B + 0
60°	E + 0	60°	D + 0	60°	C + 0

Please turn off power when adjusting settings. Remove the coin plug from one side of the fixture housing and adjust Up/Down Light (L), Photocell (P) and Power (W) by sliding the respective switch to the desired setting.


Remove the coin plug from one side of the fixture housing and adjust Color Temperature (CCT) and Beam Angle (B) by sliding the respective switch to the desired setting combination as shown above.

FIXTURE INSTALLATION

CAUTION: TURN OFF POWER BEFORE INSTALLING


DO NOT TOUCH LED

1

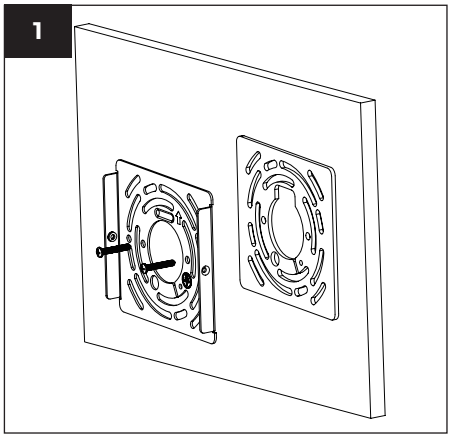


Affix the mounting plate to the wall or J-box with screws.

2

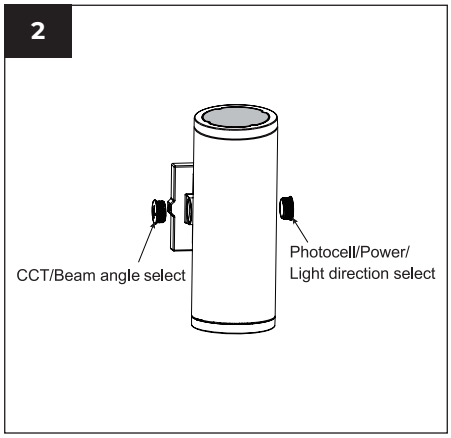


Select the desired CCT, wattage, beam angle, photocell setting and light direction. Refer to Pg. 2 for additional instructions.

3

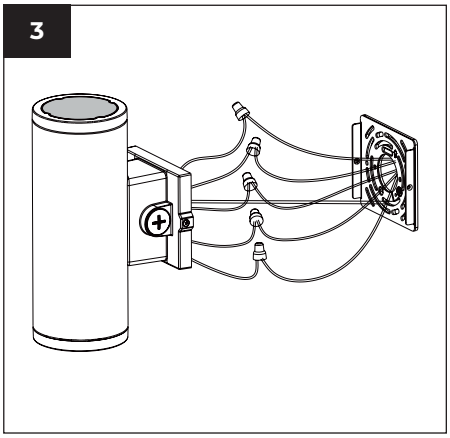


Connect the safety lanyard on the fixture to the mounting plate. Refer to Pg. 2 Wiring Diagram to complete wiring.

4

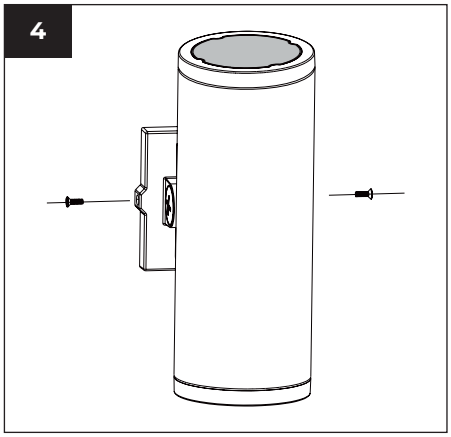

Secure the mounting plate to the junction box using the screws provided.


5

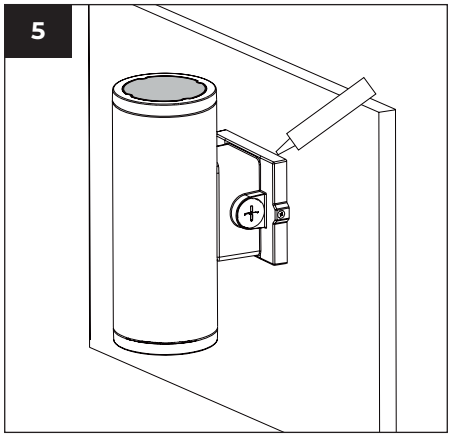

Apply weatherproof silicone sealant between the wall and fixture housing to ensure a weatherproof installation.

SQUARE CONVERSION KIT (SOLD SEPARATELY)

1. Slide the square housing onto the cylinder, ensuring the side with the screw holes faces upward.
2. Place the top cover onto the square housing and secure it with the provided screws.

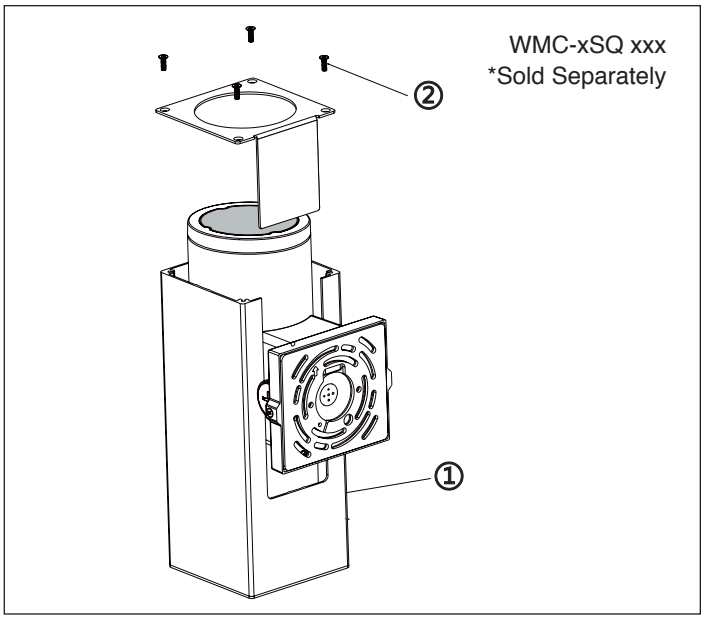

CLEANING

Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized. Clean the lens and fixture with a non-abrasive glass cleaning solution. Do not open fixture to clean the LEDs. Do not touch the LEDs.

aleo LIGHTING + CONTROLS

© **2026 Aleo Lighting, Inc.** All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use.

Aleo Lighting + Controls
www.aleolighting.com
10988 Bloomfield Ave.
Santa Fe Springs, CA 90670
Ph: 877-358-8825